


Speed information display: speed and pictograms

THE I-SAFE 1 ALTERNATES SPEED DISPLAY WITH PICTOGRAM MESSAGES

- ✓ Colored speed information (green, yellow or red according to the driver behaviour).
- ✓ Pictograms or short text messages.
- ✓ All-in-one, mobile and easy to handle.
- ✓ Different power possibilities: solar energy, public lighting, 220 V network or battery.

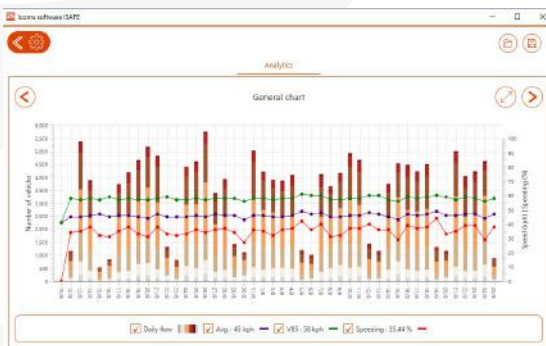

WHY CHOOSE AN I-SAFE?

USEFUL

- compact
- light
- removable battery
- predefined settings speed zones
- calendar function (up to 4 periods/day)

COMFORTABLE AND USER-FRIENDLY

- comprehensive software for data analysis
- full standard kit including the fastening system

ADVANTAGES



- ✓ high visibility: 39 cm figures
- ✓ color pictograms
- ✓ 4 power possibilities
- ✓ settings without PC
- ✓ easy and quick installation

SETTINGS

Choice of predefined settings (digit encoder)
Custom configuration with USB stick or Bluetooth (optional)

- minimum and maximum speed display thresholds
- color speed thresholds (green, yellow, red)
- blinking flash speed threshold
- text or pictograms
- time slots

TECHNICAL FEATURES

Displayed speed	From 5 to 199 km/h
Measured speed	From 5 to 255 km/h
Detection range	> 200 m
Mounting system	2 hooks at panel's rear + 2 specific pole brackets
Operating temperatures	From -40 °C to +65 °C
Power	Rechargeable 12/24 Ah battery or 110-220 V (network or public lighting) or solar powered
Autonomy	Depending on power supply
Frequency	K-Band: 24.125 Ghz
Transmitted power	< 5 mW
Communication interface	USB (options: Bluetooth, modem 3G or 4G)
Memory	540 000 measures
Dimensions	Figures: 384 x 513 mm (H x L) Housing: 775 x 655 x 140 mm (H x L x P)
Weight without battery	12.4 kg
Software	
PC running	Windows 10 or higher, min. 512 MB RAM
Disk space	50 MB

OPTIONS

- 3G modem
- Online analytics platform
- Bluetooth



STANDARD
Directive 2014/53/EC



ICOMS DETECTIONS SA

Avenue Albert Einstein 11/B | B-1348 Louvain-la-Neuve (Belgium) | T + 32 10 45 41 02 | F + 32 10 45 04 61 | info@icomsdetections.com

I-SAFE 1 STM